



## Automatic Textile Screen Printer

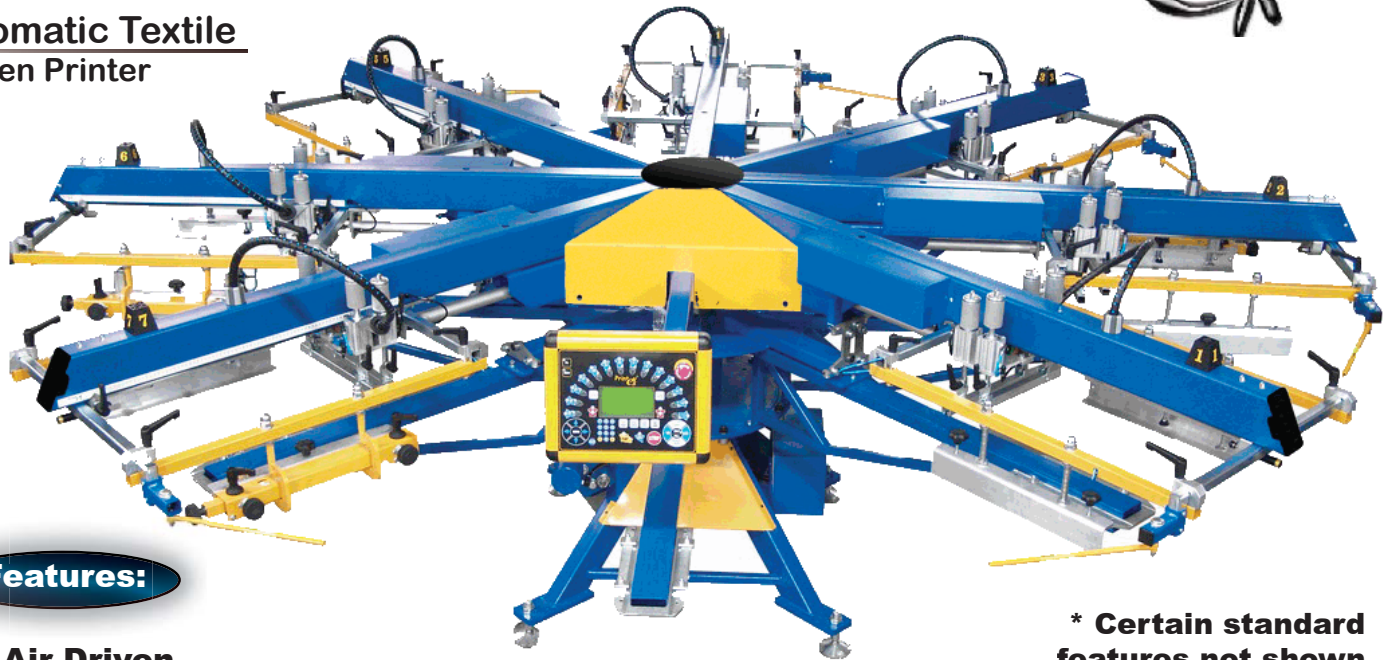

### Features:

- **Air Driven**
- **Air Printheads**
- **4 Colors/6 Stations to 9 Colors/10 Stations**
- **Maximum Image Area 41 x 46 cm (16" x 18")**
- **Standard Pallet Size 41 x 56 cm (16" x 22")**

\* **Certain standard features not shown in image**

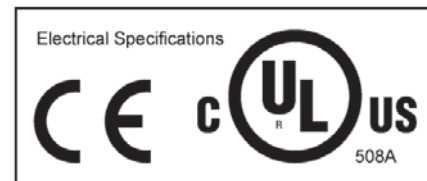

**European Technology • Quality Service • Affordable Price**

The Workman will out-SPORT the competition with its superior construction, it is ready to tackle the most rigorous workloads. Workman offers standard features that outclass the competition with its compact design plus the highest production rate in its class. The Workman has proven itself to be a rugged machine. It is designed with the latest technology, from Industrial Electronic Control Systems through its industry recognized pneumatic indexing; and all of this is coupled with an air-driven printhead. Workman will offer your production floor the most robust printing platform with 41 x 46 cm (16" x 18") printable image area, available in 4 Colors/6 Stations to 9 Colors/10 Stations. The Workman provides extreme flexibility and superior durability, the highest print quality, and optimized performance for a new decade of textile printing. Workman will out-SPORT the competition!

### The Workman Series Printheads

- Fast & Reliable Air Driven Print Stroke
- Tool Free Adjustable Front & Rear Print Stroke for Higher Production
- Rapid Screen Loading with ultra stable Pneumatic Screen Clamps
- Independent Squeegee & Floodbar Speed with Pressure Regulators
- Squeegee & Floodbars Angle Adjustments with Quick Change Pneumatic Clamps
- Side Screen Clamping easily accommodates Multi-Job Image Locations
- Full Function Head Control Buttons - Print, Up/Down, Index, Squeegee, Flood, Clamps, etc.

Colors/Stations	4/6	5/6	6/8	7/8	8/10	9/10
Air @ 6,9 bar (100 psi)	396 l/min (13 cfm)	467 l/min (16 cfm)	538 l/min (19 cfm)	609 l/min (21.5 cfm)	680 l/min (24 cfm)	736 l/min (26 cfm)
Diameter	300 cm (118")	300 cm (118")	328 cm (129")	328 cm (129")	373 cm (147")	373 cm (147")
Electrical Requirements (Single Phase)	115-120 V, 1 A, 50/60 Hz, 0.1 kW	115-120 V, 1 A, 50/60 Hz, 0.1 kW	115-120 V, 1 A, 50/60 Hz, 0.1 kW	115-120 V, 1 A, 50/60 Hz, 0.1 kW	115-120 V, 1 A, 50/60 Hz, 0.1 kW	115-120 V, 1 A, 50/60 Hz, 0.1 kW
Maximum Standard Frame Size	56 x 80 cm (22" x 32")	56 x 80 cm (22" x 32")	56 x 80 cm (22" x 32")	56 x 80 cm (22" x 32")	56 x 80 cm (22" x 32")	56 x 80 cm (22" x 32")
Maximum Standard Image Area	41 x 46 cm (16" x 18")	41 x 46 cm (16" x 18")	41 x 46 cm (16" x 18")	41 x 46 cm (16" x 18")	41 x 46 cm (16" x 18")	41 x 46 cm (16" x 18")
Standard Pallet Size	41 x 56 cm (16" x 22")	41 x 56 cm (16" x 22")	41 x 56 cm (16" x 22")	41 x 56 cm (16" x 22")	41 x 56 cm (16" x 22")	41 x 56 cm (16" x 22")



Squeegee & Floodbar Air Clamps



Side Screen Air Clamps

European Technology • Quality Service • Affordable Price



Superior Technology



Full Function Printheads